


# MorphoAccess® SIGMA Lite Series BY IDEMIA



Slim and powerful fingerprint access terminals

Compatible with  
Morpho and **biocrypt**  
existing installations

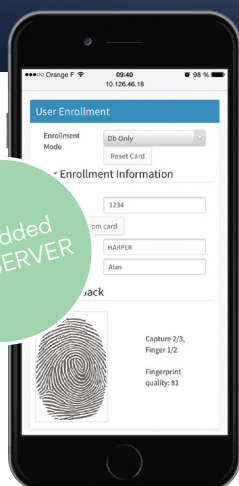

#### World's #1 fingerprint technology inside

1:10,000 user identification in 1 second

#### High capacity

30,000 templates, 250,000 IDs in authorized user list, 1 Million logs

#### Flexibility

Prox®, iClass® or MIFARE®/DESFire®/NFC contactless card reader as an option

#### Anti-fraud features

Fake finger detection, duress finger, timed anti-pass back

#### Tough design

IP65 rated and vandal resistant (IK08)



### The SIGMA family welcomes new members!

Engineered with the same attention to detail and performance as their predecessor, the MorphoAccess® SIGMA Lite terminals by IDEMIA are specifically designed to equip narrow mounting surfaces, such as glass/aluminum door mullions, turnstiles, or server rack doors.

With two designs and multiple card reader options, there are a variety of models to address the widest range of deployment scenarios, both indoors and outdoors.

### World's #1 fingerprint technology inside

- Morpho fingerprint technology ranked #1 by NIST for accuracy
- Up to 10,000 users (30,000 templates) in 1:N identification mode
- 1:10,000 user matching in 1 second
- Accuracy maintained regardless of number of users in database
- FBI PIV IQS certified optical sensor

### Full set of card reader options

- Prox®
- iClass®
- MIFARE®/MIFARE® Plus/DESFire®/NFC<sup>(1)</sup>

### MA SIGMA Lite

With blue/green/red LED indicator and buzzer



### MA SIGMA Lite+

With 2.8" QVGA color touchscreen and buzzer



S  
T  
R  
S  
O  
L  
N  
S  
S  
S  
I  
G  
M  
A  
= THE RIGHT COMBINATION  
L  
M  
A  
F  
E  
R  
E  
T  
K

### Enhanced interactivity on MA SIGMA Lite+ touchscreen

- Time & Attendance In & Out function keys
- User ID, PIN and BioPIN<sup>(3)</sup> management
- Intuitive icons and live messages

### Anti-fraud features

- Fake finger detection
- Duress finger
- Timed anti-pass back function<sup>(4)</sup>
- Banned/authorized user lists


### Built for the real World

### Embedded web server

#### TOUGH DESIGN<sup>(2)</sup>



#### EASY INSTALLATION AND MAINTENANCE

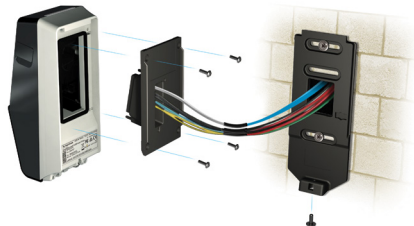

#### COMPATIBLE WITH EXISTING INSTALLATIONS

Morpho and bioscrypt®

- Using MorphoManager by IDEMIA or MIK SDK on a Morpho network
- Using SecureAdmin application or SecureSDK on a Bioscrypt network



Enables on-device enrollment, terminal configuration and transaction log retrieval



Use with any device (PC, laptop, tablet, smartphone)



Use with any OS (Apple iOS, Android, Windows)



Use with any web browser (Google Chrome, Mozilla Firefox, Safari, Internet Explorer)

<sup>(1)</sup> NFC support depends on the smartphone model used with the MA SIGMA Lite/Lite+ device  
<sup>(2)</sup> IK08 rating is not available for MA SIGMA Lite+ design

<sup>(3)</sup> Alternate password solution instead of fingerprints  
<sup>(4)</sup> Prevents repeated authorizations by the same user, within a configurable time period

## Technical specifications

- **CPU:** ARM® Cortex™-A9 core 1GHz
- **Linux Operating System**
- **FBI PIV IQS certified optical fingerprint sensor**
- **Contactless reader options:** Prox®, iClass®, MIFARE®/MIFARE® Plus/ DESFire®/NFC<sup>(1)</sup>
- **Network/Communication:**
  - Ethernet, RS485, USB
  - Wi-Fi option
- **Power supply:**
  - 12V-24V DC
  - Power over Ethernet (PoE), compatible with PoE+ switches
- **Internal storage capacity:** 512MB Flash, 512MB RAM
  - 500 user records, extendable to 3,000 or 10,000 with license (\*3 templates each, including 1 duress)
  - 250,000 IDs in authorized user list
  - 1 Million transaction logs
- **Inputs/outputs:** Wiegand In & Out (customizable up to 512 bits), OSDP, Door Relay, 2 General Purpose Inputs (including Door monitoring), 2 General Purpose Outputs
- **Tamper switches**
- **Operating conditions:**
  - Temperature: -20°C to 55°C (-4°F to 131°F)
  - Humidity: 10% to 80% (non condensing)
- **Ingress protection:** IP65
- **Mechanical impact protection:** IK08<sup>(2)</sup>
- **HxWxD =** 156\*68\*62 mm (6.14\*2.68\*2.44 inches)
- **Weight:** 280 grams
- **EMC/Safety standards:**
  - CE, CB, FCC, BIS
  - UL294 (for indoor use only)
- **RoHS, REACH and WEEE compliant**



THE SIGMA FAMILY

<sup>(1)</sup> NFC support depends on the smartphone model used with the MA SIGMA Lite/Lite+ device

<sup>(2)</sup> IK08 rating is not available for MA SIGMA Lite+ design