

# A Full Range of Recording Systems



## Ultimate Performance SVR-3200/1680

- 32 Channel half D1 resolution 960fps(N), 800fps(P) recording
- 16 Channel D1 resolution 480fps(N), 400fps(P) recording
- Multi-stream support
- Powerful CMS support standard
- 16 channel audio recording
- Built-in DVD Writer, up to 6 multi-monitor
- Convenient Thumbnail/Bookmark search modes



## High Quality Recording SVR-1660/1645

- 16 Channel 480fps(N), 400fps(P) real-time recording
- Multi-stream support (SVR-1660)
- Powerful CMS support standard
- 16 channel audio recording, Various search modes
- Built-in DVD Writer, Max. 3 multi-monitor



## Versatile System SVR-960/945

- 9 Channel 270fps(N), 225fps(P) real-time recording
- Powerful CMS support standard
- Fast backup with DVD writer and USB ports
- Convenient search modes, Max. 3 multi-monitor
- ATM/POS text recording

## Super Vision DVR 32Ch/16Ch/9Ch SVR-3200/1680/1660/1645/960/945



### Specifications

	SVR-3200	SVR-1680	SVR-1660	SVR-1645	SVR-960	SVR-945
<b>DISPLAY</b>						
Video						
Inputs	32 Composite video 0.5-2 Vpp, 75 ohm automatic termination		16 Composite video 0.5-2 Vpp, 75 ohm automatic termination		9 Composite video 0.5-2 Vpp, 75 ohm automatic termination	
Resolution			NTSC : 704 x 480 / PAL : 704 x 576			
Frame Rate			NTSC : 480fps / PAL : 400fps			
Live			NTSC : 704 x 480 / PAL : 704 x 576		NTSC : 270fps / PAL : 225fps	
Multi Screen Display		1 / 4 / 9 / 10 / 16			1 / 4 / 9	
<b>PERFORMANCE</b>						
Compression						
	Up to 480fps@704 x 480(N)	Up to 480fps@704 x 480(N)	MPEG-4		Up to 120fps@704 x 480(N)	
	Up to 960fps@704 x 240(N)	Up to 480fps@704 x 240(N)	Up to 240fps@704 x 240(N)		Up to 240fps@704 x 240(N)	
	Up to 960fps@352 x 240(N)	Up to 480fps@352 x 240(N)	Up to 270fps@352 x 240(N)		Up to 270fps@352 x 240(N)	
	Up to 400fps@704 x 576(P)	Up to 400fps@704 x 576(P)	Up to 100fps@704 x 576(P)		Up to 100fps@704 x 576(P)	
	Up to 800fps@704 x 288(P)	Up to 400fps@704 x 288(P)	Up to 200fps@704 x 288(P)		Up to 200fps@704 x 288(P)	
	Up to 800fps@352 x 288(P)	Up to 400fps@352 x 288(P)	Up to 400fps@352 x 288(P)		Up to 225fps@352 x 288(P)	
Recording						
Mode						
Overwrite Modes						
Pre-alarm						
Post-alarm						
Search Mode						
Playback Function						
Transmission Speed						
Bandwidth Control						
Multi Stream						
Max. Remote Users						
Protocol Support						
Monitoring						
Maximum Capacity						
Internal HDD						
External HDD						
DVD Writer (Back up)						
USB (Back up)						
File Format (Back up)						
Password Protection						
Data Authentication						
<b>INTERFACE</b>						
VGA						
Main Composite						
Sub Composite						
Loop Outputs						
Inputs						
Output						
Compression						
Sampling Rate						
Inputs						
Outputs						
Remote Notification						
Ethernet						
Serial Interface						
PTZ Control Interface						
Connections						
USB						
eSATA						
Application Support						
Supported PTZ Cameras						
<b>GENERAL</b>						
Input Voltage						
Power Consumption						
Operating Temperature						
Operating Humidity						
Dimensions (WxHxD)						
Mechanical						
Weight (4X Hard Disks)						
Rack Mount Kit						
Language						

\* Some functions will be added to next firmware version.



The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

Design and specifications are subject to change without notice.

### Dimensions

Unit : mm



SVR-3200



SVR-1680




SVR-1660




SVR-1645




SVR-960




SVR-945



SVR-960



SVR-945



SVR-945



## Full D1 Quality Recording in Real-time

## Imagine High Quality Real-time Recording

The SVR series includes cutting-edge digital recording systems that achieve D1(704 x 480,N) high resolution real-time recording capability, simultaneous streaming of both MPEG-4 and JPEG streams for optimal network images, CMS network integrated system support, and powerful search and playback features for enhanced convenience.

Preliminary

SAMSUNG TECHWIN




**SAMSUNG TECHWIN CO., LTD.**  
145-3, Sangdaewon 1-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do Korea 462-703  
Tel : +82-31-740-8151 ~ 8 Fax : +82-31-740-8145  
www.samsungcctv.com

**SAMSUNG TECHWIN AMERICA**  
1480 Charles Willard St. Carson, CA 90746, UNITED STATES  
Toll Free : +1-877-213-1222 Fax : +1-310-632-2195  
www.samsungcctvusa.com

**SAMSUNG OPTO-ELECTRONICS UK, LTD.**  
Samsung House, 1000 Hillwood Drive, Hillwood Business Park  
Chertsey, Surrey, UNITED KINGDOM KT16 0PS  
Tel : +44-1932-45-5308 Fax : +44-1932-45-5325

**TIANJIN SAMSUNG OPTO-ELECTRONICS CO., LTD.**  
No.9 Zhangheng Street, Micro-Electronic Industrial Park  
Jingang Road, Tianjin, P.R. CHINA 300385  
Tel : +86-22-23887788-8503 Fax : +86-22-23887788-8505

DISTRIBUTED BY

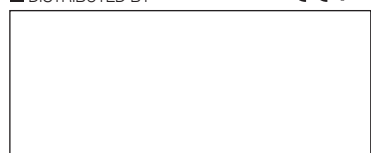

I.D-0809





## Samsung Techwin introduces Super Vision Recording Systems

Samsung Techwin's high-tech DVR series, SVR-3200/1680/1660/1645/960/945 provides D1 high resolution video real-time recording capability and real-time high quality network monitoring with multi-stream and CMS management features. Also, the DVRs are equipped with a wide range of smart functions for user convenience and system reliability, enabling the user to have a premium quality recording and monitoring system at any time.



*As if you are watching a high quality movie...*

**High resolution D1 image real-time recording**  
**Powerful Functions, Flexible Systems**



- D1 (704 x 480) 480fps(N) real-time video recording
- Multi-stream support for optimized network monitoring
- Powerful CMS support as standard
- 16 channel audio recording, Thumbnail search
- Built-in DVD writer, Max. 6 multi-monitor



Super Vision Digital Video Recorder

**SVR-3200/1680/1660/1645/960/945**




## High Image Quality Live & Recording



High Quality Image




## Enhanced Network Monitoring

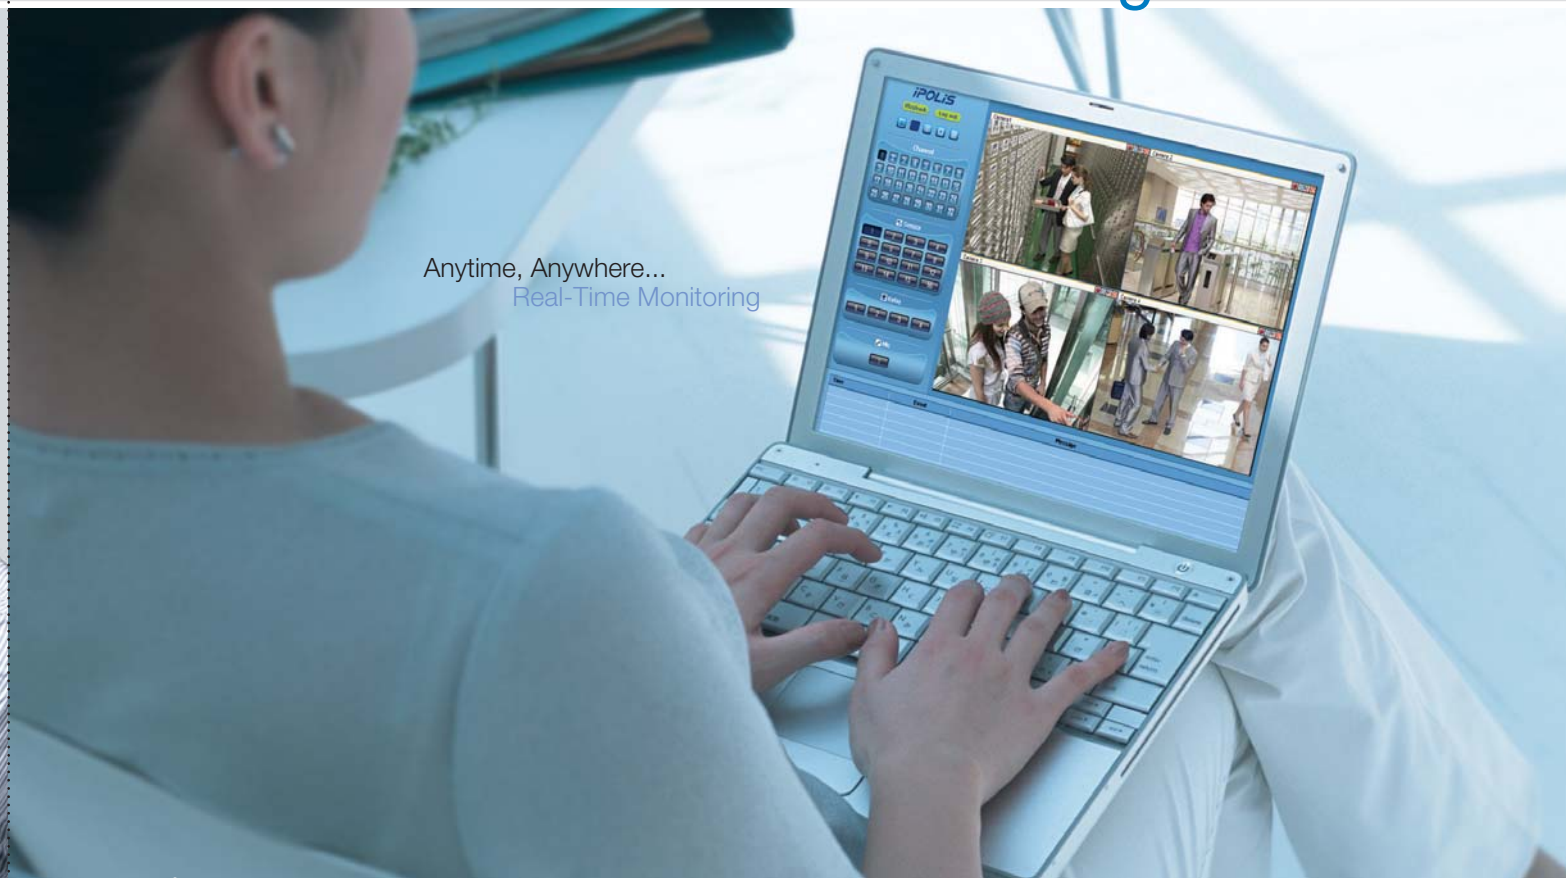

### Real-time High resolution (704 x 480, N) Recording

- The SVR series has applied a high speed data processing technology for all channel MPEG-4 full-frame compression. It is possible to record and play D1(704 x 480, N) level high resolution images of 480fps in real time. (SVR-3200/1680)

- The SVR series also supports high quality still image recording when an event occurs.



### 16 Channel Audio Recording

Audio recording is possible on up to 16 channels, and there is an audio detection feature so that event recording is possible when sound is detected at a specific level.



### Emergency Recording Mode

Regular recording, event recording, or scheduled recording can be programmed at the same time to provide an optimal response to application requirements. Also, the DVR has a recording lock feature so that event recordings are protected from being recorded over.



### Reliable DVR File System

Incorporating a high-capacity and high speed data storage technology, the SVR series allows the user all channel recording and playback of D1 images. Also, the SVR file system reduces hard disk header motion which reduces heat and provides longer drive life expectancy.



### Multi-stream Support for Real-time Monitoring

The SVR series supports simultaneous streaming of both high and low bandwidth MPEG-4 streams. The low bandwidth QCIF stream is used for multi-screen monitoring and the high bandwidth stream is used for full screen viewing and recording. This conserves network bandwidth. In addition, the SVR series supports JPEG streams to provide support for browser-based devices and e-mail.



### Convenient Monitoring with Web viewer

The DVR has a built-in web server that enables users to monitor and playback DVR images through the Web viewer regardless of place and time.



Web-viewer Monitor

Web-viewer Playback



## Powerful Network Management



### Powerful CMS Support (SNM-128S/P)

Samsung Techwin DVRs come with a copy of the standard version of our Network Management software. This is a map-based GUI that will allow the user to monitor and control multiple DVRs from one viewing and control location.



SNM-128S CMS Software




### Max. 128 Channel Real-time Monitoring

The SNM-128S/P can monitor up to 128 channels from anywhere in the world simultaneously. A maximum of 64 cameras can be shown on one monitor. It also supports a wide variety of screen split modes such as 1, 4, 9, 13, 16, 25, 36 and 64 divisions.



### Enhanced Event/Alarm Management

The users can check the event with more ease via enhanced event/alarm functions such as List, Map, Beeper, Live Image, and Tree modes.

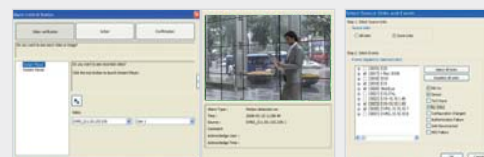


### Powerful MAP Viewer Support

A map viewer feature is supported with the SNM-128S/P. It provides graphic map information of the alerted areas when events occur, ensuring more efficient security management.



## Advanced User Convenience

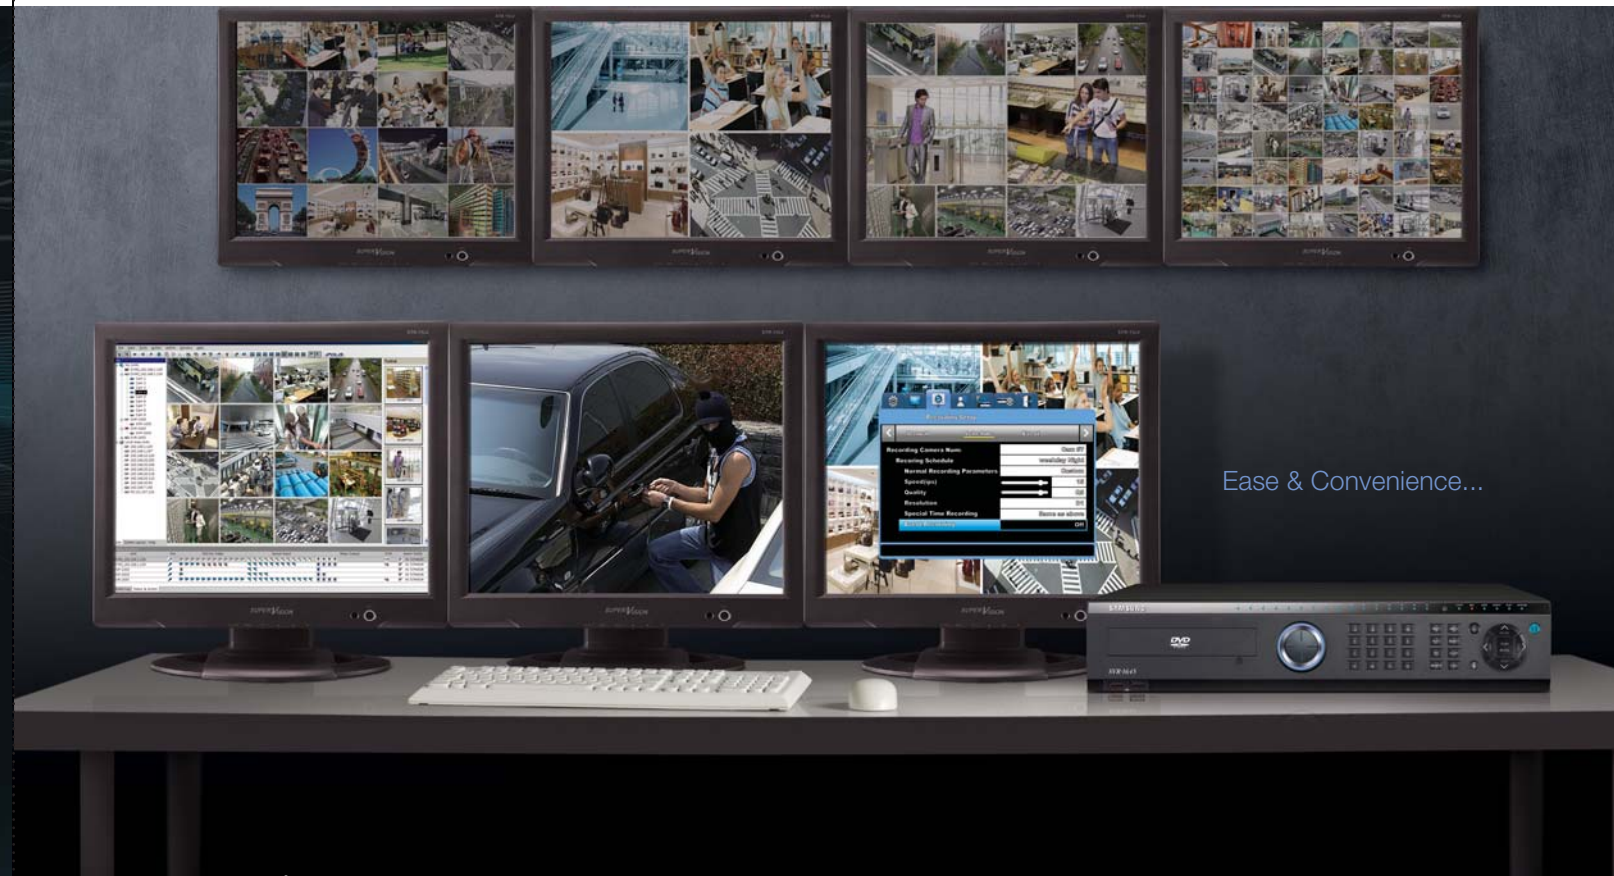

Ease & Convenience...



### Various Quick & Easy Search Modes

- Thumbnail Search**  
Users can check videos in the thumbnail image viewer and find saved videos more quickly
- Book Mark Function**  
When users register desired playback points, users can directly play the video when needed without searching it again.
- Calendar Search**  
Videos can be easily searched for by just entering a selected date and time.



Thumbnail Search

Calendar Search



### Multi-monitor Support

Multiple multi-screen monitors can be connected to the DVR, providing flexible viewing and control options. Some models support up to 3 monitors, and some support up to as many as 6 monitors.



### High Speed DVD Back up

The DVR comes equipped with a high speed DVD writer that can back up large amounts of data much faster. For example, 4 gigabytes of data can be copied to a DVD within just 30 minutes without interrupting recording. In addition, easy backup with front USB ports are also provided.



DVD Writer

Front USB port

## High Quality Real-time DVR



### Maximum 16TB Capacity

Up to 4 internal HDDs can be installed in the DVR for long-term recording, and the SVS-5E, an external hard drive bay can also be added to expand the storage capacity up to 12HDDs.  
(\* Up to 16TB expansion is possible with both internal/external HDDs)



SVS-5E HDD Extension Unit



### ATM/POS Text Recording

The SVR series are compatible with ATM, POS, or access control devices. Text data can be saved along with associated images, and played back later.



### System Controller

Using the SCC-3100A, system controller, integrated control of up to 255 DVR and PTZ Domes is possible. It is equipped with multiple protocols to connect with and control various devices from other manufacturers as well allowing users to set up a large sized security system easily.



SCC-3100A



### Convenient Design

The SVR-3200/1680/1660/1645 provide a jog/shuttle dial and LED indicator lamps for greater convenience. This allows for quick and easy forward or reverse playback review of recordings.

